


# MARCOTHERM PROFILO DI RACCORDO

Code PR62P

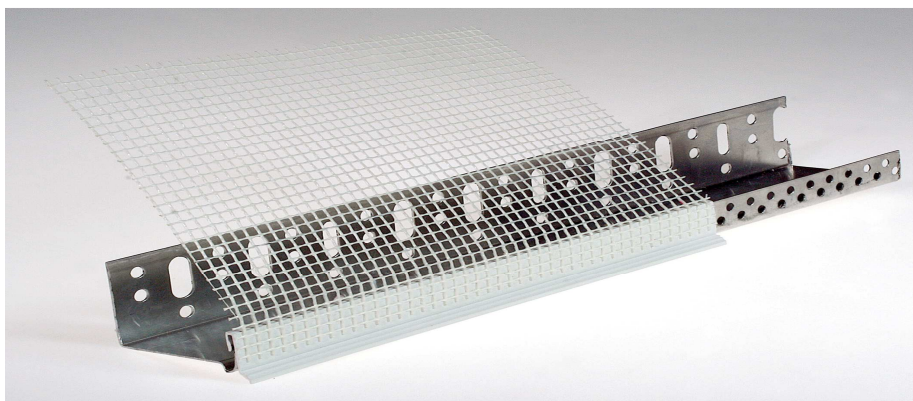

## DESCRIPTION

PVC junction profile with drip channel for connection between aluminium base profile and reinforcing mesh in External Thermal Insulation Composite Systems.

Ideal for exposed skirting, providing a connection that will last over time.

Consult the "Marcotherm Application Manual" for the correct use of the product.

## CONDITIONS FOR USE

When applying, the air and surface temperatures must not be below +5°C.

## STORAGE

Maximum storage temperature: +30 °C

Minimum storage temperature: +5 °C

Keep in a dry place away from sources of moisture.

Product code	Angle bead material	Dimension of mesh in cm	Length in cm	Number of pieces per package
PR62P	PVC	11	250	25

*COLORIFICIO SAN MARCO guarantees that the information herein is provided to the best of its technical and scientific knowledge and based on its experience; nonetheless, the company may not be held liable for the results obtained using these products, as application conditions are beyond its control. It is recommended to always make sure that the product is suited to each specific instance. The present sheet voids and replaces any previously existing sheets. For further technical information call the technical service +39 041 4569322.*

Colorificio San Marco Spa – Via Alta 10 – 30020 Marcon (VE) – Tel +39 041 4569322 – Fax +39 041 5950153 – [info@san-marco.it](mailto:info@san-marco.it)

**san  
marco**  
SISTEMI VERNICIANTI PER L'EDILIZIA