


# MARCOTHERM PROFILO SOTTOFINESTRA

Code PSxxAV

## MARCOTHERM UNDER-WINDOW PROFILE

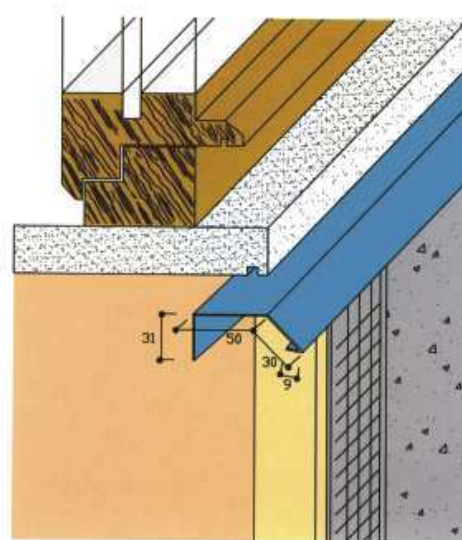

### DESCRIPTION

Silver painted aluminium under-window capping profile for External Thermal Insulation Composite Systems. Can also be used for the upper closing of surfaces. Consult the "Marcotherm Application Manual" for the correct use of the product.

### CONDITIONS FOR USE

When applying, the air and surface temperatures must not be below +5°C.

### STORAGE

Maximum storage temperature: +30 °C  
Minimum storage temperature: +5 °C  
Keep in a dry place away from sources of moisture.

| Product code | Insulation thickness (mm) | Profile measurement (mm) | Length (cm) | Number of pieces per package |
|--------------|---------------------------|--------------------------|-------------|------------------------------|
| PS50AV       | 30-40-50                  | 31x50x30x9               | 250         | 10                           |
| PS80AV       | 60-70-80                  | 51x80x30x9               | 250         | 10                           |
| PS120AV      | 90-100-120                | 51x120x30x9              | 250         | 10                           |

*COLORIFICIO SAN MARCO guarantees that the information herein is provided to the best of its technical and scientific knowledge and based on its experience; nonetheless, the company may not be held liable for the results obtained using these products, as application conditions are beyond its control. It is recommended to always make sure that the product is suited to each specific instance. The present sheet voids and replaces any previously existing sheets. For further technical information call the technical service +39 041 4569322.*

Colorificio San Marco Spa – Via Alta 10 – 30020 Marcon (VE) – Tel +39 041 4569322 – Fax +39 041 5950153 – [info@san-marco.it](mailto:info@san-marco.it)

**san  
marco**  
SISTEMI VERNICIANTI PER L'EDILIZIA