

ROXIDAN

INTERIOR DECORATIVE FINISH WITH OXIDIZED EFFECT

series 391

Colorificio San Marco SpA gives priority to environmental protection and safety in the workplace. For this reason Colorificio San Marco constantly seeks to improve the quality of its products and their production cycles in order to reduce the overall impact on the environment and ensure quality and safety for customers.

This environmental data sheet shows the environmental information of ROXIDAN: LCA, LEED and other information.

ROXIDAN creates a metalized decorative patina that reproduces the typical oxidized effect of substrates that have been aged due to weathering.

LIFE CYCLE ASSESSMENT

Life Cycle Assessment (LCA) is a tool to quantify the environmental impact of a product or service throughout its entire life cycle. The LCA methodology, as defined by ISO 14040/44 [1-2], consists of four phases:

- goal and scope definition
- inventory analysis
- impact assessment
- interpretation

Goal and scope


The **goal** of this LCA [3] is to provide transparency about the environmental performance of ROXIDAN, to create improvement options and support environmental communication. The functional unit is 1 kg of paint including packaging, with a spreading rate of 8-10 sqm/l. The **system boundaries** include raw materials, their transportation, processing, packaging, distribution, use and packaging disposal. During the use phase the paint is hand-applied and the associated emissions are insignificant.

Inventory analysis

Primary data are used to the most significant processes, like the paint recipe, packaging and factory consumptions and emissions. Data refer to 2011 and are collected at the Colorificio San Marco's factory located in Marcon (VE). Secondary data originate from the ecoinvent v2 database [4]. The LCA calculations are performed with the LCA software SimaPro 7.3 [5].

Impact assessment

Life cycle impact assessment has been done with the method **PCR paint 2010:18 on paint [6]**, as indicated in the EPD programme of the International EPD Consortium. This method consists of different environmental indicators including the Carbon Footprint, energy content, material resource consumption, water consumption and waste. Table 1 shows the LCA results.

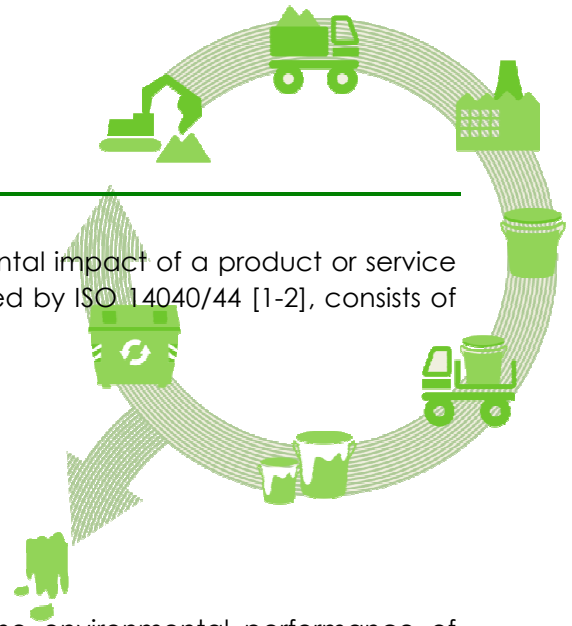

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com

ROXIDAN

INTERIOR DECORATIVE FINISH WITH OXIDIZED EFFECT

series 391

Table1: LCA results.

		Unit	Total	Upstream	Core	Downstream
Impact categories	Global Warming (100 yr)	kg CO ₂ eq	1.50	1.11	0.07	0.33
	Ozone layer depletion (20 yr)	mg CFC-11 eq	0.297	0.261	0.007	0.029
	Photochemical oxidation	g C ₂ H ₄ eq	1.55	1.32	0.03	0.20
	Acidification	g SO ₂ eq	5.20	3.96	0.30	0.94
	Eutrophication	g PO ₄ ³⁻ eq	1.93	1.25	0.34	0.34
	Human toxicity infinite	kg 1,4-DB eq	0.609	0.458	0.030	0.121
	Fresh water aquatic ecotox.	kg 1,4-DB eq	0.439	0.179	0.016	0.244
	Freshwater sediment ecotox.	kg 1,4-DB eq	1.00	0.38	0.04	0.58
	Marine aquatic ecotox.	kg 1,4-DB eq	656	358	29	270
	Marine sediment ecotox.	kg 1,4-DB eq	479	226	19	235
		Unit	Total	Upstream	Core	Downstream
Energy content	Non-renewable	MJ eq	31.0	26.8	1.0	3.2
	Renewable	MJ eq	1.14	2.13	0.09	-1.08
Material resource consumption	Non-renewable	kg	0.550	0.327	0.032	0.192
	Renewable	kg	47.1	45.5	0.9	0.7
Other	Material to recycling	kg	0.033	0.001	0.003	0.030
	Water consumption	kg	47.1	45.5	0.9	0.7
Waste	Non hazardous waste	kg	0.088	0.030	0.010	0.049
	Hazardous waste	g	1.82	0.46	0.49	0.87

Interpretation

The LCA results indicate that the largest contributions come from upstream processes (i.e. raw materials). The Carbon Footprint of ROXIDAN is 1.50 kg CO₂ eq and its water consumption is 47.1 litres. The negative value of renewable energy content is caused by the pallet reuse.

LEED

LEED means Leadership in Energy and Environmental Design. It is a voluntary program that provides third-party verification of green buildings. It provides building owners and operators a tool to understand their building's environmental performance and to create healthy indoor spaces.

In order to obtain LEED certification, projects must satisfy prerequisites and earn points (there is a threshold). The number of points the project earns determines its level of LEED certification.

LEED is a certification system that deals with the environmental performance of buildings based on overall characteristics of the project. Although LEED does not certify products and services of individual companies, products and services do play a role and can help projects with credit achievement.

The table below shows ROXIDAN potential contribution to the different **LEED credits** of the LEED 2009 Rating System for New Construction and Major Renovations [7]. Table 1 shows the possible contribution of the paint to potential credits, if used properly.

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com

ROXIDAN

INTERIOR DECORATIVE FINISH WITH OXIDIZED EFFECT

series 391

Table 2: Potential LEED credits.

LEED Credits	Description	Possible points	Notes
MR credit 5	Regional Materials	1-2 points	According to the percentage of products locally extracted and manufactured
IEQ credit 3.2	Construction Indoor air quality management plan	1 point	More information are available on request

Colorificio San Marco does not guarantee that credits will be obtained by projects pursuing LEED certification. The designer or engineer will need to evaluate and verify if the project complies with the LEED requirements.

OTHER INFORMATION

VOC Dir. 2004/42/EC

Limit value EU (Dir. 2004/42/EC) [8]

Cat. A/I: Decorative effect coatings (water-base): 200 g/l (2010)

ROXIDAN Contains max: 200 g/l VOC

ECODESIGN INDEX

Counter of ecodesign activities affecting the coating, accomplished by the company.

N°	Activity item	Date
1	first issue	mar-2013

References

- [1] ISO 14040, 2006: Environmental management, Life cycle assessment, Principles and framework. CEN, EN ISO 14040:2006 (www.iso.org).
- [2] ISO 14044, 2006: Environmental management, Life cycle assessment, Requirements and guidelines. CEN, EN ISO 14044:2006 (www.iso.org).
- [3] Colorificio San Marco, LCA project, "Environmental Data Sheet" 2014.
- [4] Ecoinvent, 2013: Database ecoinvent v3. Swiss Centre for Life Cycle Assessment, (www.ecoinvent.ch).
- [5] PRé, 2014: LCA software SimaPro 8.0.3. PRé Consultants, the Netherlands (www.pre-sustainability.com).
- [6] PCR 2014:5. Paints and varnishes and related products. Product Category Rules (PCR) for preparing an environmental product declaration (EPD) for paints and varnishes and related products, the Swedish Environmental Management Council (www.environdec.com).
- [7] Verify n. 37585 30 april 2014 – CSQA Certificazioni Srl – Thiene (VI) Italy
- [8] USGBC, LEED 2009 and LEED v4: Rating System for New Construction and Major Renovations (new.usgbc.org/leed)
- [9] Directive 2004/42/CE of the European Parliament and of the Council on the limitation of emissions of volatile organic compounds due to the use of organic solvents in certain paints and varnishes and vehicle refinishing products and amending Directive 1999/13/EC (21 april 2004)

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com